


MOTUL TRANSOIL EXPERT

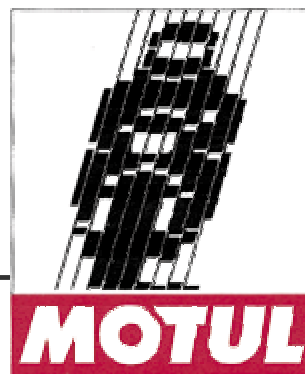

Lubricant for gearbox

with wet clutch

of 2 stroke engine motorbikes

Technosynthèse® - SAE 10W-40

TYPE OF USE

Specially formulated for gearboxes with wet clutch used in severe conditions.

All gearboxes with wet clutch:

All Motorbikes, Road, Trails, Cross, Enduro, Mopeds, Scooters, Quads...

Surpasses the following manufacturers' recommendations :SAE 10W-30 engine oil or SAE 80 gearbox oil.

In gearboxes without wet clutch, use MOTUL GEAR 300, MOTUL MOTYLGEAR, or MOTUL GEARBOX.

PERFORMANCE

Very easy gear shifting, particularly in extreme conditions (pressure, temperature) thanks to its high viscosity at hot temperature.

Specific additivation for gears.

Control of clutch slip for a smoother riding.

Dispersant properties to maintain the clutch clean.

Extreme pressure, Anti-wear, Anti-corrosion, Anti-foam.

RECOMMENDATIONS

Oil change: According to manufacturers' requirements and adjust according to your own use.

PROPERTIES

Technosynthèse®, multigrade lubricant.

Viscosity grade	SAE J 300	10W-40
Density at 15°C (59°F)	ASTM D1298	0.870
Viscosity at 100°C (212°F)	ASTM D445	13.9 mm ² /s
Viscosity at 40°C (104°F)	ASTM D445	95 mm ² /s
Viscosity index	ASTM D2270	150
Pour point	ASTM D97	-30°C / -22°F
Flash point	ASTM D92	220°C / 428°F

We retain the right to modify the general characteristics of our products in order to offer to our customers the latest technical development

Product specifications are definitive from the order which is subject to our general conditions of sale and warranty. Made in FRANCE

MOTUL - 119 Bd Félix Faure - 93303 AUBERVILLIERS CEDEX - BP 94 - France - Tel 33 1 48 11 70 00 - FAX 33 1 48 33 28 - Web site : www.motul.com

07/00